

nifty

SD64 SELF DRIVE WORK PLATFORM



63ft 6in

Platform height

41ft 6in

Working outreach

4 Wheel Drive

Maximum traction
over rough terrain

4 Wheel Steer

Superior maneuverability on site

Independent Suspension

For fast comfortable
movement on site

**Platform Rotation
& Jib-Boom**

Improved access to applications

Turf Tires Available

For minimal disruption to
sensitive grass surfaces



niftylift.com





nifty SD64


The Nifty **SD64** is the ultimate combination of trailer mounted and self propelled platforms. With full independent suspension and 4 wheel drive, the **SD64** can cope with a wide range of working environments. Low weight design make it economical to transport and 4 wheel steer gives the operator enormous flexibility to maneuver once on site. Excellent gradeability coupled with a good travel speed allow the **SD64** to be positioned and set up quickly, allowing the operator to spend more of their time working.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible & Visual Alarms
- Lock Valves on all Hydraulic Cylinders
- Dual Controls (Platform & Base)
- Manual Recovery with Hand-Pump
- Meets OSHA and ANSI Regulations

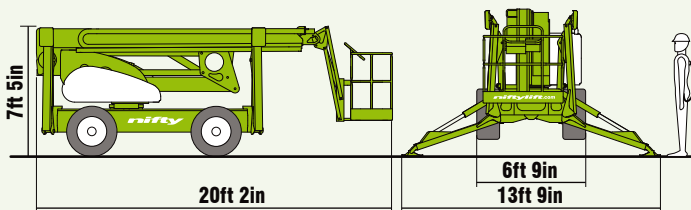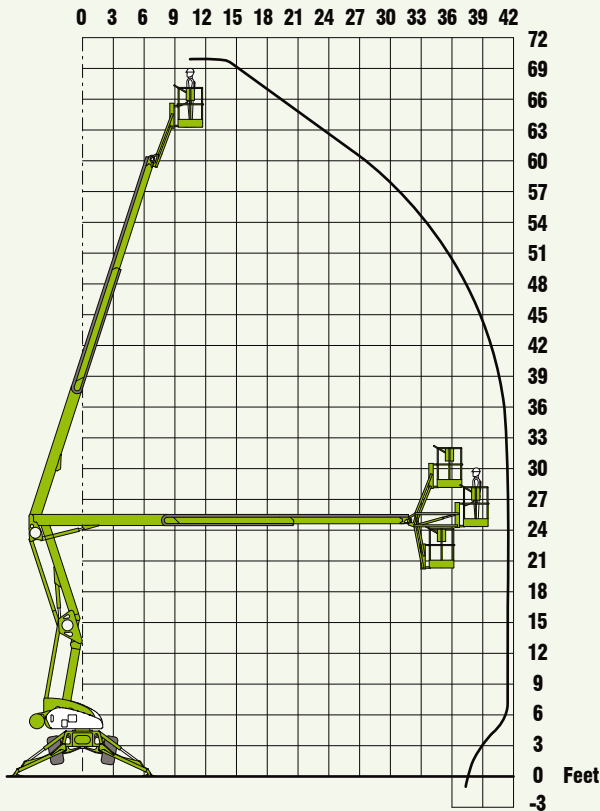

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

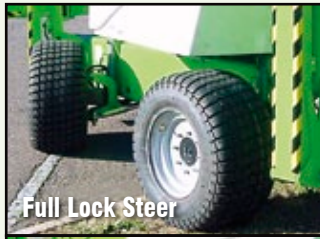

The extra maneuverability available from the 4 wheel steer coupled with the special "Turf Tires" make the **SD64** ideal for working on sensitive surfaces such as grass.

SPECIFICATIONS

Working Height	70ft
Platform Height	63ft 6in
Working Outreach	41ft 6in
Slew	360°
Flyboom Arc	150°
Width - Travelling	6ft 9in
- Working	13ft 9in
Height	7ft 5in
Length	20ft 2in
Minimum Weight	8,700lbs*
Turning Radius - Outside	11ft 6in
Platform Rotation	100°
Platform Capacity	500lbs
Platform Size	4ft 11in x 2ft 4in
Drive Speed	4.7mph
Gradeability	45%
Control System	Fully Proportional Hydraulic
Power System	Kubota 1505 32Hp

* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

NIFTYLIFT INC

32 Concourse Way,
Greer, SC 29650 USA
Sales: 1-800-NIFTYLIFT (800-643-8954)
Office: 1-877-MYNIFTY (877-696-4389)
Fax: 1-864-968-8836
e.mail: info@niftylift.com
www.niftylift.com

NIFTYLIFT LTD

Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733
e.mail: info@niftylift.com
www.niftylift.com