


nifty

SP64 **HYBRID AWD** **SELF PROPELLED** **WORK PLATFORM**

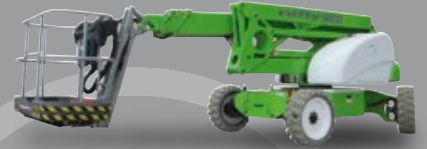

62ft

Platform height

41ft

Unrestricted outreach at 500lbs

40% Gradeability

AWD for rough terrain

GVW Only 14,110lbs

Lightest in its class

Superb Manoeuvrability

13ft outside turning radius

Swing-Out Engine Tray

Quick & easy to service

**Platform Rotation
& Jib-Boom**

Improved access to
applications

Hybrid Power

Fuel efficient &
environmentally conscious



niftylift.com

nifty SP64 HYBRID AWD


The **SP64 Hybrid All-Wheel-Drive (AWD)** is one of a new generation of environmentally conscious work platforms from Niftylift. Combining advanced power-source technology with versatile AWD, it delivers outstanding performance from a compact and low-weight design.

On Diesel, the **SP64's** revolutionary **Hybrid** system can automatically utilize its electric motor to boost power whenever needed. This allows the **SP64 Hybrid AWD** to operate with a smaller engine, reducing fuel consumption and its exhaust purification system then further reduces CO/NOx, particulates, and noise emissions.

The **SP64 Hybrid AWD** can also operate on battery alone, making it ideal for indoor, quiet or clean applications. **Diesel Re-Gen** re-charges the batteries without a mains power source and a fast charge is achieved whenever the machine is idle and the engine is left running.

SAFETY FEATURES

- Automatic Fail-Safe Brakes
- Tilt Alarm
- Foam Filled Tires
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- Meets OSHA and ANSI Regulations

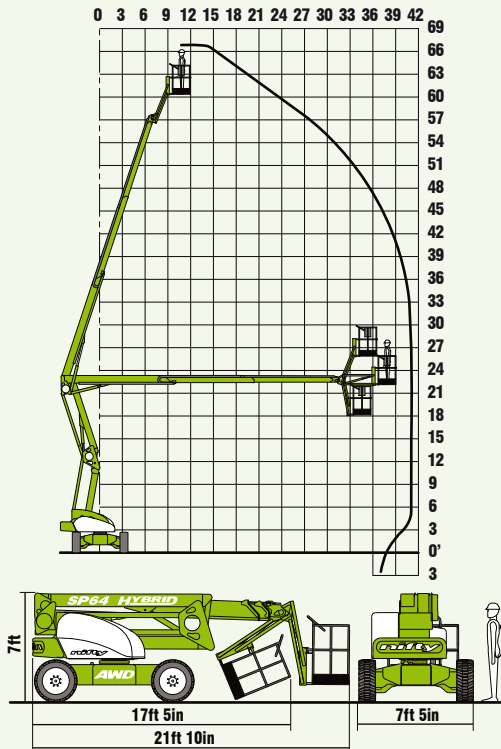

The **SP64 Hybrid AWD** also incorporates Niftylift's new **ToughCage** technology. Its tough impact resistant composite base and larger cross-section steel cage give extra strength and durability, both protecting the operator and reducing the risk of damage to the cage.

SPECIFICATION

Working Height	68ft 6in
Platform Height	62ft
Working Outreach	41ft
Slew	360°
Fly-Boom Arc	150°
Width	7ft 5in
Height	7ft
Length - Stowed	17ft 5in
- Overall	21ft 10in
Minimum Weight	14,110lbs*
Turning Radius - Outside	13ft
Platform Rotation	100°
Platform Capacity	500lbs
Platform Size	5ft 11in x 2ft 9in
Drive Speed	2.8mph
Gradeability	40%
Power System	Hybrid (Battery & Diesel) Kubota 722 (18Hp)

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

NIFTYLIFT INC

32 Concourse Way,
Greer, SC 29650 USA
Sales: 1-800-NIFTYLIFT (800-643-8954)
Office: 1-877-MYNIFTY (877-696-4389)
Fax: 1-864-968-8836
e.mail: info@niftylift.com
www.niftylift.com

NIFTYLIFT LTD

Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733
e.mail: info@niftylift.com
www.niftylift.com